

www.bfm-europe.com

BFM Europe Limited, Trentham Lakes, Stoke-on-Trent, Staffordshire ST4 4TJ
Tel: 01782 339000 Fax: 01782 339009 Email: info@bfm-europe.com



gas fires 2010-11













Welcome to Verine

At Verine we know how important it is to create a stylish and relaxing living environment. That's why we've developed this collection of premium gas fires to complement all tastes and lifestyles.

I believe our success stems from a combination of innovative design, investment in technology and the highest quality manufacturing standards.

As a result all Verine fires carry a 5 year guarantee to reflect my belief in their quality and durability, and our experienced Verine retailers are hand-picked to give you the very best advice and service.

This brochure has been designed to make the purchase of your new Verine fire as simple as possible. I hope you will find it both informative and inspiring.





WERINE FIRES TO INSPIRE

Beautiful fires, designed to allure

Choose a Verine fire and all your expectations will be fulfilled.

Elegant, sophisticated and designed to perfection. Verine fires are all this and more. Crafted to not only captivate and beguile, they are built to the highest standards, are energy efficient and perform brilliantly.

Expect optimum quality & performance from your fire

Verine fires are built to last in our state-of-the-art UK manufacturing facility where our quality standards meet the stringent demands of ISO 9001/2000. That's why we are able to offer an impressive 5 Year Guarantee on all gas fires.

Every fire in the range features a Flame Supervision Device (FSD) which detects the presence of a flame, and in the absence of that flame, prevents uncontrolled release of gas to the burner. For maximum safety each conventional flue model also includes an Oxygen Depletion Sensor (ODS) which shuts off the gas supply to the main burner in the unlikely event of a fault.

We recommend that all gas appliances be serviced by a Gas Safe Register engineer to ensure continued safe operation and optimum performance throughout the lifetime of the product. In order to encourage and promote this good practice, an annual service, including replacement of the oxy-pilot, is a condition of our 5 Year Guarantee.

Expect the highest level of after sales service & expert advice

For over 45 years Verine have sold quality products and given quality service, elegance and innovation to the fireplace industry. Specially appointed retailers have been established nationally to display our products, install them and give expert advice to help you choose the correct appliance to suit your needs.

We want you to get the maximum benefit from this expertise and therefore recommend you avoid purchasing any Verine product over the internet, especially from companies not located in your area who are unable to offer the highest levels of aftersales service.





Today BFM Europe is the fastest growing domestic fire producer in the country with an unequalled reputation for quality and service. Every Verine branded gas fire is developed and manufactured in Britain at our purpose built, state-of-the-art facility in Stoke-on-Trent.



Our 5 year guarantee

From design stage to manufacture every effort is taken to produce an appliance that will provide exceptional and continued standards of safety and performance. Every fire is assessed and approved by leading independent organisations and rigorously checked by our Quality Control department before leaving our state-of-the-art facility.

Therefore, we are confident you'll be enjoying the warmth of a Verine fire for many years to come. That's why we are able to provide a remarkable 5 Year Guarantee† with every gas fire, giving you reassurance and peace of mind. We will guarantee your fire for 5 Years* against manufacturing and material defects, including parts and labour, subject to proof of annual service and replacement of the oxy-pilot assembly.

†A 7 Year Guarantee is offered on selected products. *Terms and conditions apply.

Contents

Find your perfect fire

High Efficiency
Before you begin
High Efficiency Fires
Da Vinci 6-7
Distinction 8-9
Orbis HE 10-11
Quasar HE 12-13
Frontier HE 14-18
Midas HE 16-17
Atina HE 18-19
Eden HE & HE Balanced Flue 20-21
Carmelo HE 22-23
Fontana Compact HE 24-25
Fontana HE 26-27
Meridian 28-29
Alpena BF HE 30-31
Marcello BF HE 32-33
Ravena HE PF 34-35
Hearth Mounted Fires
Acclaim 36-37
Zodiac 38-39
Quasar 40-41
Frontier
Sigma 44-45
Midas 46-47
Orbis 48-49
Atina 50-51
Wall Mounted Fires
Vertex 52-53
Carmelo 54-55
Fire Options 56-57
Power Flue Installations 58-59

2

Get up to 94% net efficiency from your gas fire

Verine has always had a reputation as a manufacturer of some of the most efficient fires on the market. Now we have set new industry standards with the introduction of the Verine HE high efficiency range: exceptional heat output combined with lower running costs compared to standard gas fires. Verine's R&D team has invested in developing the technology to meet the key objective of producing gas fires that save energy and as a result, help to keep costs down.



83%

Distinction HE Page 8



Quasar HE Page 12



Midas HE



Eden HE & **Eden HE Balanced Flue** Page 20



Fontana Compact HE Page 24



Meridian Page 28



Marcello Balanced Flue Page 32

highefficiency



Da Vinci HE Page 6



89%

Orbis HE Page 10



Frontier HE Page 14



Atina HE Page 18



Carmelo HE Page 22



Fontana HE Page 26



Alpena Balanced Flue



Ravena HE Powerflue

Before you begin

There is a Verine fire for all tastes, from traditional to contemporary chic. However, before you make your final selection, please take time to consider the following.

RADIANT OR CONVECTOR?

A radiant fire emanates heat from the combustion chamber only, which is why Verine radiant fires incorporate a glowing back panel to maximise heat output. A convector fire has the added benefit of a heat exchanger attached to the back of the fire. This draws cold air in and sends it back out into the room as hot air, maximising heat output whilst keeping your fuel bills down.

Your gas supply will either be Natural Gas or LPG, depending on the area in which you live.



Natural Gas The most common gas supply



Alternative for houses with no Natural Gas supply

CHIMNEY OR FLUE?

Your choice of fire will be dictated by the type of chimney or flue you have. If you're not sure, then take a look at your roof and cross-reference it with the simple guide below. It is also worth noting that a slimline fire will fit virtually any chimney or flue, whereas a full-depth often requires a traditional chimney or rebate on the fire surround.



A conventional brick chimney is easily recognisable by a chimney stack with accompanying terracotta pot or gas terminal.



Pre-Fabricated Flue

This is an interlocking metal flue tube system easily identifiable by a metal flue and terminal on the roof and a metal flue box behind the fire.



Built from concrete or clay blocks, pre-cast flues provide a rectangular section flue. They can be identified by a ridge vent or metal flue tube and terminal on the roof.

NO CHIMNEY OR FLUE?

Some properties have no chimney or flue, in which case a balanced flue or



Powerflue fires expel the flue gases directly outside the building through the use of an electronically driven fan unit mounted on the external wall A sophisticated microprocessor monitors performance and automatically shuts off the fire in the unlikely event of operation failure.



Balanced Flue fires vent directly outside through a horizontal co-axial pipe (one pipe within a larger pipe). The outer pipe draws air in from the outside and the inner pipe expels combustion gases. An electricity supply is not required for these products.

CONTROLS

Gas is wonderfully controllable, but which type of control suits you best? The discretion of manual ignition, concealed behind the removable ash pan... the convenience of slide control... or the luxury and style of remote control?



Manual Control Simple and discreet. The control system is located behind the fires fret or trim. Once the fire is lit rotate the control

knob to adjust the flame height and heat output.



Touchlight (T/L) -Control via two switches, On/Off & High/Low.



Semi Easy Flame Control Light the fire using the manual control then use easy accessible buttons to adjust the heat.

Fully Remote Control

The remote control

handset is used to

flame height and

heat output.

Slide Control

system which is

located on the top

right-hand side of the

fire Push and hold

the lever down to

ignite and move it up and down to adjust

the flame height and heat output.

A convenient control



Easy Flame Control (EFC) - Discreet, easy access buttons are used to ignite the fire and adjust heat and flame height.



handset to adjust the flame height and heat output



Fully Remote with Thermostat The remote control handset can be used to light the fire as well as to adjust the flame

height and heat output. In addition, the handset contains the extra benefit of a thermostatic control to regulate room temperature and a programmable timer that can be pre-programmed to ensure your room will be warm whenever you wish.

FIRE BACK PANEL

Some Verine fires offer you the option of a brick back panel, plain back panel or ribbed back panel – simply choose the one that suits your room from the options available







FUEL BED OPTIONS

Most Verine fires are available with the option to specify your own fuel bed and create a look to suit your home.












The Da Vinci

This stunning fireplace features a highly realistic log fuel bed and is complemented by a beautiful and mesmerising lazy flame. With a choice of Limestone or Travertine surround and brick effect or black ribbed back panels you can create either a traditional or contemporary look. This balanced flue fire features thermostatic operation and an incredible 83% efficiency.

Model	Da Vinci
Description	Complete balanced flue suite
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	8.7kW
Heat input - low	5.5kW
Heat output - high	6.5kW
Net Efficiency	up to 83%
Air vent required	Not normally required

All figures measured on 350mm horizontal flue duct in accordance with clause 7.11 of BS EN 613 : 2001

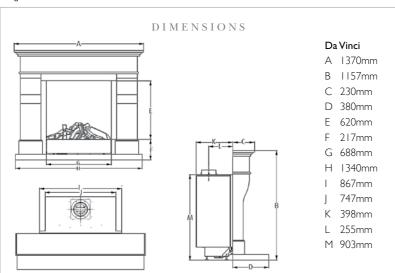








The Distinction

The Distinction suite features subtle chamfered edges, a realistic log fuel bed and a beautiful mesmerising flame. A choice of brick effect or black ribbed back panels and Limestone or Travertine surround is available. This balanced flue fire features thermostatic operation and an incredible 83% efficiency.

Model	Distinction
Description	Complete balanced flue suite
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	8.7kW
Heat input - low	5.5kW
Heat output - high	6.5kW
Net Efficiency	up to 83%
Air vent required	Not normally required

All figures measured on 350mm horizontal flue duct in accordance with clause 7.11 of BS EN 613 : 2001

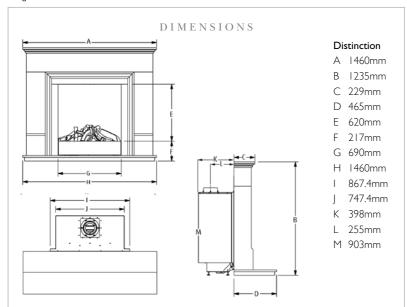








highefficiency The Orbis HE

The Orbis HE is a full depth high efficiency fire providing a maximum heat output of 4kW and an incredible 89% net efficiency. This glass fronted fire is available with a choice of manual, slide and remote control operation. Create your own look with an extensive range of trims and frets shown on pages 52-53.

Description	n Full depth inset convector	
Safety	Flame supervision device & oxygen depletion sensor	
Type of heat	Radiant & Convected	
Heat input - high	5.0kW	
Heat input - low	3.5kW	
Heat output - high	4.0kW	
Net Efficiency	up to 89%	
Air vent required	Not normally required	



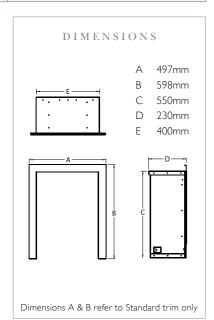




highefficiency The Quasar HE

The Quasar HE offers an impressive net efficiency of up to 78% and features one of the most realistic coal fuel beds on the market. This glass fronted product has been designed to fit in to most chimney and flue types, including Pre-Cast flue when installed with a 3" rebated fire surround. Manual, slide and remote control options are available to choose from.

Description	Full depth inset convector
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	4.5kW
Heat input - low	3.5kW
Heat output - high	3.2kW
Net Efficiency	up to 78%
Air vent required	Not normally required



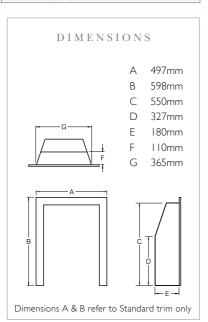






The Frontier HE

The Frontier HE is the epitome of modern day living combining the benefits of a highly efficient gas fire with sleek contemporary styling. The cool stainless steel lines of this glass fronted fire are framed by a subtly textured black trim. Frontier HE is available as a hearth mounted or hole-in-the-wall fire.

Description	Full depth inset convector
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	4.5kW
Heat input - low	3.5kW
Heat output - high	3.2kW
Net Efficiency	up to 78%
Air vent required	Not normally required



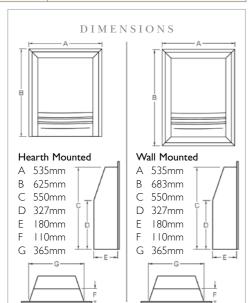






The Midas HE

This slimline high efficiency fire boasts a net efficiency of up to 89% and will fit almost any chimney or flue including pre-cast (BS EN 1858).

It also features a large viewing window and an incredible 3.2kW heat output.

Description	Slimline inset convector
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant & Convected
Heat input - high	4.0kW
Heat input - low	2.0kW
Heat output - high	3.2kW
Net Efficiency	up to 89%
Air vent required	Not normally required



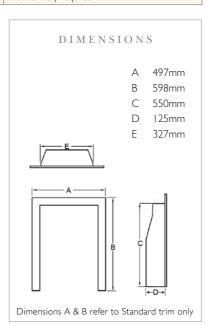





The Atina HE


The Atina HE's perfect petite proportions and fabulous black reflective interior combined with a spellbinding flame makes this little hole-in-thewall gas fire a magnificent centre-piece for smaller modern living areas.

The Atina HE features a maximum heat output of 3.5kW and is controlled by a fully sequential remote control system with thermostatic operation so you can always maintain a comfortable room temperature that suits you.

SPECIFICATIONS

Description	Full depth inset convector
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	5.0kW
Heat input - low	3.0kW
Heat output - high	3.5kW
Net Efficiency	up to 77%
Air vent required	Not normally required

Heat input and output figures are specific to natural gas models only

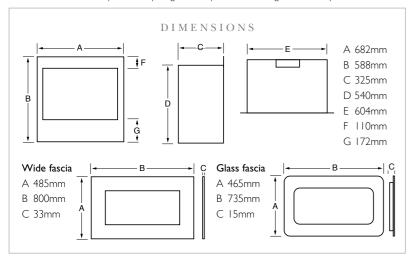













POSSIBLE TRIM ALTERNATIVES





Trimless with white stones

Glass silver fascia and white stones

Wide polished silver fascia and white stones

Glass champagne fascia and logs

Shown: The Atina HE with Wide antique brass fascia and logs




The Eden HE

This glass fronted landscape hole-in-the-wall fire has an incredible 83% net efficiency and up to 5.2kW heat output. It features an enchanting flame picture and comes with a choice of log or white stone fuel bed. The Eden HE has been designed as a trimless* fire for a very minimalist appearance, or team with an optional designer trim for a more prominent centrepiece.

*Please refer to the installation manual for more information regarding installation requirements.

Description	Full depth inset convector	
Safety	Flame supervision device & oxygen depletion sensor	
Type of heat	Radiant & Convected	
Model	Eden HE	Eden HE BF
Heat input - high	6.9kW	6.3kW
Heat input - low	2.0kW	2,0kW
Heat output - high	5.2kW	4.8kW
Net Efficiency	up to 83%	up to 84%
Air vent required	Not normally required	

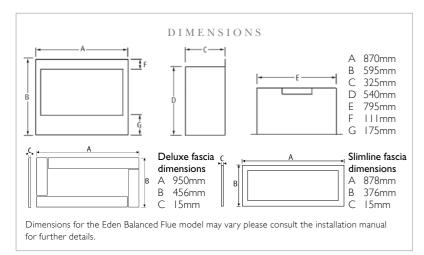








The Carmelo HE

If you're looking for extravagance combined with exceptional heat output then the Carmelo HE is the ideal gas fire for you. With a viewing area measuring 1145mm along with an enchanting flame picture this hole-in-the-wall fire is certainly a show-stopper, and with a heat output of 6.5kW and 75% net efficiency it provides exceptional performance too. What's more this fire can be installed almost anywhere in the home since it uses a balanced flue system with a choice of horizontal flue, vertical flue or chimney conversion flue kits available to choose from. Both log and white stone fuel beds are supplied with every fire.

Description	Full depth inset convector
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	9.5kW
Heat input - low	5.5kW
Heat output - high	6.5kW
Net Efficiency	up to 75%
Air vent required	Not normally required

Heat input and output figures are specific to natural gas models only



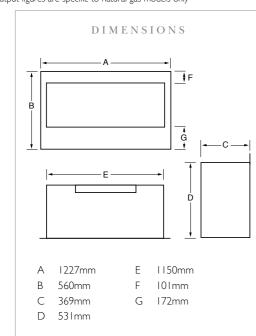








The Fontana Compact HE

The petite dimensions of the Fontana HE Compact makes it ideal for smaller living spaces. Featuring a stylish graphite grey and brushed steel fascia this high efficiency hole in the wall gas fire is up to 87% efficient (net) and is operated by a thermostatic remote control system. A balanced flue equivalent is also available.

Description	Hole-in-the-wall convector	
Safety	Flame supervision device & oxygen depletion sensor*	
Type of heat	Radiant & Convected	
Model	Fontana HE Compact	Fontana HE Compact BF
Heat input - high	4.4kW	5.5kW
Heat input - low	3.1kW	3.0kW
Heat output - high	3.5kW	4.2kW
Net Efficiency	up to 87%	up to 84%
Air vent required	Not normally required	

^{*} Conventional flue models only

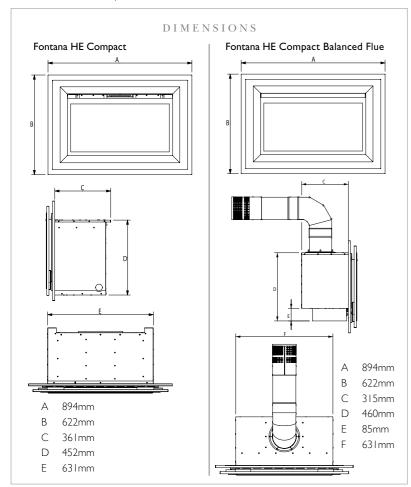






The Fontana HE

The Fontana has an incredible 87% net efficiency and is operated by a thermostatic remote control system. It features a striking graphite grey and stainless steel fascia and comes with a highly realistic log fuel bed. Balanced flue models are also available.

Description	Hole-in-the-wall convector	
Safety	Flame supervision device & oxygen depletion sensor	
Type of heat	Radiant & Convected	
Model		
Heat input - high	5.4kW	7.5kW
Heat input - low	3.0kW	3.5kW
'		
Heat output - high	4.2kW	5.5kW
Net Efficiency	<u>'</u>	
Air vent required	Not normally required	

^{*} Conventional flue models only

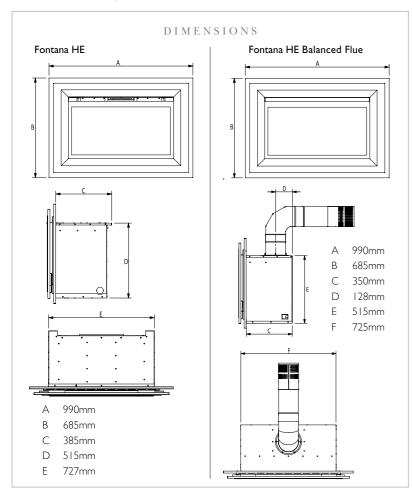






The Meridian

A combination of contemporary fascia design and traditional log fuel bed is sure to make the Meridian an impressive feature in any home. This exceptionally versatile fire can be installed as a modern hole-in-the-wall fire or with a fire surround for a more traditional look. Choose between black ribbed, cream ribbed or brick effect fire back (flame picture will differ on balanced flue model).

SPECIFICATIONS

Description	Full depth inset convector	
Safety	Flame supervision device & oxygen depletion sensor	
Type of heat	Radiant & Convected	
Model	Meridian	Meridian BF
Heat input - high	5.6kW	5.1kW
Heat input - low	I.9kW	1.9kW
Heat output - high	4.1kW	4.4kW
Net Efficiency	up to 75%	up to 87%
Air vent required	Not normally required	Not normally required

Heat input and output figures are specific to natural gas models only

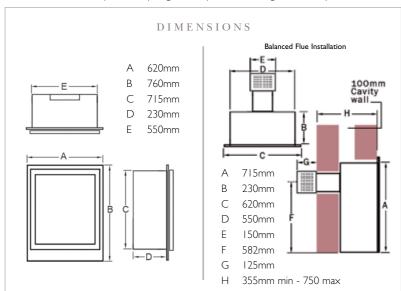



TRIM ALTERNATIVES Bronze/Champagne




highefficiency The Alpena


pages 52-53).

The Alpena boasts up to 94% efficiency, it is a glass fronted fire featuring plain back panels and a deep coal fuel bed (flame picture will differ on balanced flue model). The product can be styled with a variety of trims and frets available in the Verine range (see

Description	Full depth inset convector
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	4.6kW
Heat input - low	3.0kW
Heat output - high	4.3kW
Net Efficiency	up to 94%
Air vent required	Not normally required

Heat input and output figures are specific to natural gas models only

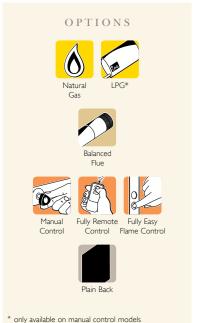

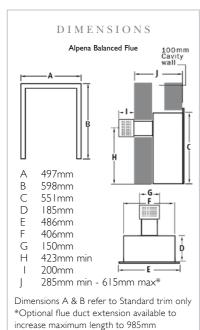





The Marcello


This high efficiency balanced flue fire is perfect for modern homes without a chimney or flue and features a natural stone fuel bed. The Marcello can be wall hung or inset into most external walls* and is available with an optional stainless steel trim.

* An additional wall plate is required for inset applications.

SPECIFICATIONS

Description	Hang-on-the-wall balanced flue
Safety	Flame supervision device
Type of heat	Radiant & Convected
Heat input - high	4.8kW
Heat input - low	2.2kW
Heat output - high	4.2kW
Net Efficiency	up to 87%
Air vent required	Not normally required

Heat input and output figures are specific to natural gas models only

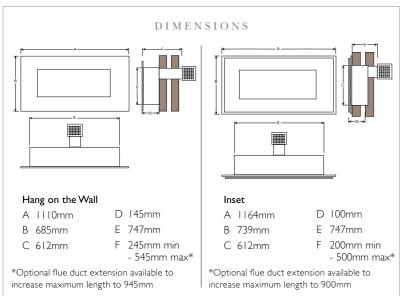










The Ravena HE Powerflue

The Ravena is one of the most economical Powerflue fires available with an exceptional efficiency of up to 76%. It effectively combines a deep fuel bed with a slimline construction, allowing the fire to be fitted with most standard fireplaces. See pages 54-55 for more information about Powerflue systems and installation possibilities.

Description	n Full depth inset powerflue	
Safety	Flame supervision device & oxygen depletion sensor	
Type of heat	Radiant & Convected	
Heat input - high	7.0kW	
Heat input - low	4.1kW	
Heat output - high	5.3kW	
Net Efficiency	up to 76%	
Air vent required	Not normally required	

Heat input and output figures are specific to natural gas models only

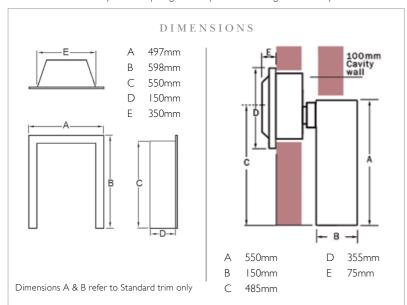






The Acclaim

An ideal replacement for a real coal fire, the Acclaim is a tapered inset fire specifically designed to fit into existing firebacks. Flickering flames and a deep fuel bed glow create a highly realistic effect capturing the essence of a real open fire. A choice of models including a high leg suitable for Victorian Cast fascias is available.

Description	Full depth inset tray	
Safety	Flame supervision device & oxygen depletion sensor	
Type of heat	Radiant	
Model	16"	VIC16"
Heat input - high	6.8kW	6.8kW
Heat input - low	4.1kW	4.1kW
Heat output - high	3.3kW	3.3kW
Air vent required	Not normally required	Not normally required

Heat input and output figures are specific to natural gas models only



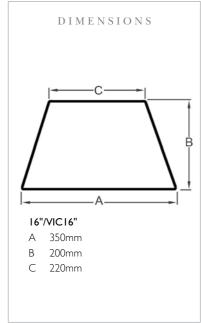



The Zodiac


The Zodiac is a fully open fronted deep fuel effect fire featuring a 'stepped' fireback designed to maximise heat output whilst also providing wonderful warmth and glow. This model is available with the option of either manual, Easyflame or remote control.

SPECIFICATIONS

Description	Full depth inset radiant
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant
Heat input - high	6.8kW
Heat input - low	4.1kW
Heat output - high	3.7kW
Air vent required	Not normally required

Heat input and output figures are specific to natural gas models only



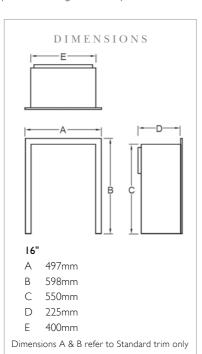




The Quasar

The Quasar has been specifically designed as a multi-installation fire and will fit most flue types including Pre-cast when fitted with a 3" rebated surround. It is also suitable for installation into a standard chimney without the need to remove the chairbrick. There is a choice of coal or pebble fuel bed and a Powerflue option is available for homes without a chimney.

Description	Full depth inset radiant	
Safety	Flame supervision device & oxygen depletion sensor	
Type of heat	Radiant	
Model	Quasar	Quasar PF
Heat input - high	6.9kW	7.0kW
Heat input - low	4.2kW	4.3kW
Heat output - high	3.3kW	4.0kW
Air vent required	Not normally required	Not normally required

Heat input and output figures are specific to natural gas models only

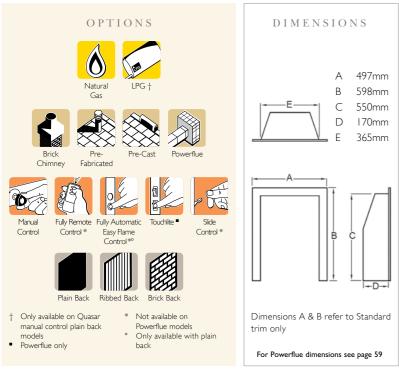






The Frontier

This open fronted radiant fire features a contemporary one piece fascia and is available with a choice of coal or pebble fuel bed. The Frontier has the option of manual or remote control operation and will fit in to most chimney and fuel types including Pre-cast when installed with a 3" rebated fire surround.

Description	Full depth inset radiant
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant
Model	Frontier
Heat input - high	6.9kW
Heat input - low	4.2kW
Heat output - high	3.3kW
Air vent required	Not normally required
Heat output - high	3.3kW



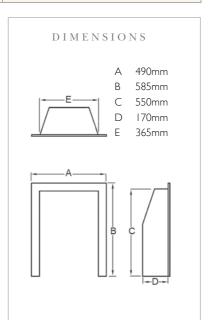









The Sigma

The Sigma features a modern one piece fascia that comes in a variety of colour combinations to complement any décor. This fire is suitable for installation into almost any flue type, including a Powerflue option and is available with a choice of coal or pebble fuel bed.

Description	Full depth inset radiant	
Safety	Flame supervision device & oxygen depletion sensor	
Type of heat	Radiant	
Model	Sigma	Sigma PF
Heat input - high	6.8kW	7.0kW
Heat input - low	4.1kW	4.3kW
Heat output - high	3.6kW	4.0kW
Air vent required	Not normally required	Not normally required

Heat input and output figures are specific to natural gas models only

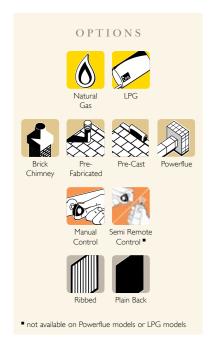

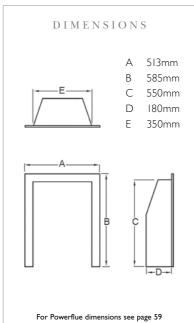






The Midas

This ultra-slim radiant offers great flexibility and ease of installation. As well as being suitable for installation into standard chimneys and flues, the Midas is also available as a multi-installation Powerflue which can be flued from the side or rear of the product so that the fire does not need to be fitted against an outside wall (see pages 54-55 for further details). Coal or pebble fuel bed options are available.

Description	Slimline inset radiant	
Safety	Flame supervision device & oxygen depletion sensor	
Type of heat	Radiant	
Model	Midas	Midas PF
Heat input - high	6.8kW	6.8kW
Heat input - low	4.2kW	4.6kW
Heat output - high	3.9kW	4.3kW
Air vent required	Not normally required	Not normally required

Heat input and output figures are specific to natural gas models only



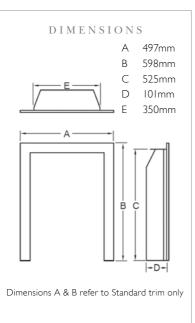






The Orbis

With a maximum heat output of 4kW the Orbis is one of the warmest open-fronted convector fires in the Verine range. It features a mesmerising and highly realistic coal fuel bed making this product one of the closest things you can get to a real coal fire. This model is available with a choice of manual, slide or remote control operation and a wide range of trims and frets (see pages 52-53) ensuring you'll get the product that is just right for you.

Description	Full depth inset tray
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant & Convected
Heat input - high	6.9kW
Heat input - low	4.2kW
Heat output - high	4.0kW
Air vent required	Not normally required



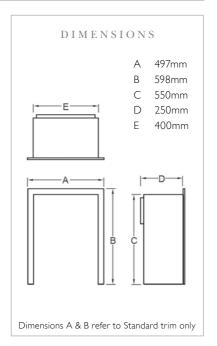




The Atina


The compact and minimalist design of the Atina hole-in-the-wall fire makes this a very popular contemporary product. Customize your own design with a wide choice of trim styles, colours and fuel beds.

Description	Hole-in-the-wall radiant
Safety	Flame supervision device & oxygen depletion sensor
Type of heat	Radiant
Heat input - high	7.0kW
Heat input - low	3.8kW
Heat output - high	N/A
Air vent required	Not normally required

Heat input and output figures are specific to natural gas models only



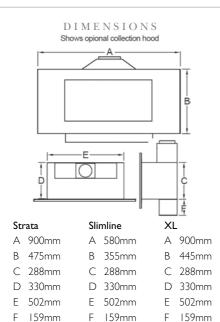

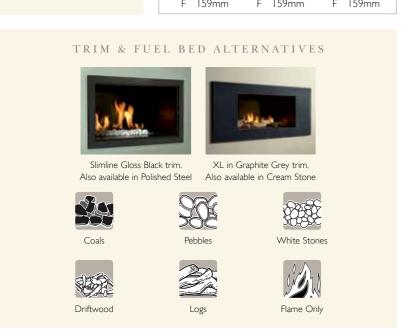




The Vertex

The Vertex is a fashionable decorative hole-in-the-wall fire that creates a stunning, minimalist fireplace. Available with the option of a Slimline, XL or Strata trim, there is a style to suit any living area.

Description	Hole-in-the-wall radiant				
Safety	Flame supervision device & oxygen depletion sensor				
Type of heat	Radiant				
Heat input - high	9.4kW				
Heat input - low	6.2kW				
Heat output - high	N/A				
Air vent required	100cm ²				

Heat input and output figures are specific to natural gas models only



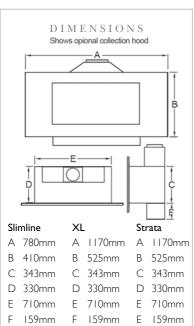






The Carmelo


The Carmelo offers the ultimate in "Wow" factor. A black painted interior beautifully highlights a stunning dancing flame picture. This fire can be simply installed as a trimless product or together with a marble, stone or granite trim built to your own bespoke specifications*. Comes as a flame only fuel bed as standard with the option to purchase driftwood, logs, pebbles or white stones.

SPECIFICATIONS

Description	Hole-in-the-wall radiant				
Safety	Flame supervision device & oxygen depletion sensor				
Type of heat	Radiant				
Heat input - high	14.5kW				
Heat input - low	7.IkW				
Heat output - high	N/A				
Air vent required	100cm ²				

Heat input and output figures are specific to natural gas models only

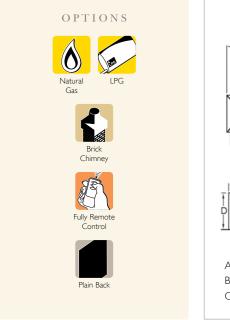

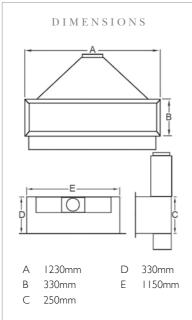

* Trims not available from Verine. Please enquire about bespoke fireplaces when visiting your local Verine stockist.







WERINE Fire Options

Tailor your fire to match your living space...

Make your Verine fire a unique fire. Choose your fascia, trim & fret and fuel bed from our divine selection to create a perfect match for your fire's setting.

Fascia options

Frontier Hearth Mounted fascias

Frontier Wall Mounted fascias















Champagne

Bronze/Champagne

Essence fascias











Satin Brass Antique Brass

Brushed Steel

Accessories Options

Black

		Trims			Fascias			Frets				
Fire Model	Standard	Profiled	Designer	Curved	Frontier Hearth	Frontier Wall	Essence	Blenheim	Elegence	Edwardian	Bauhaus	Media
Acclaim 16	Х	Х	Х	Х	Х	Х	1	1	1	1	1	1
Alpena BF	1	1	1	1	1	1	X	1	1	1	1	1
Midas	✓	1	1	1	1	1	1	1	1	1	1	1
Midas HE MC	/	1	1	1	1	1	1	1	1	1	1	1
Midas PF	/	1	1	1	1	1	1	1	1	1	1	1
Orbis HE MC & RC	✓	1	1	1	1	1	1	1	1	1	1	1
Orbis HE SC	✓	1	1	Х	X	X	X	1	1	1	1	1
Orbis MC & RC	/	1	1	1	1	1	1	1	1	1	1	1
Orbis SC	/	1	1	X	X	X	X	1	1	1	1	1
Quasar HE MC & RC	1	1	1	1	1	1	1	1	1	1	1	1
Quasar HE SC	/	1	1	Х	Х	Х	Х	1	1	1	1	1
Quasar MC & RC	/	1	1	1	/	1	1	1	1	1	1	1
Quasar PF	1	1	1	1	1	1	1	1	1	1	1	1
Quasar SC	1	1	1	Х	Х	Х	Х	1	1	1	1	1
Ravena HE	/	1	1	1	1	Х	1	1	1	1	1	1
Zodiac 16	✓	1	1	1	/	1	1	/	1	1	1	1

Fret options

Blenheim









Polished - 16"

Brass - 16"

Elegance







Black - 16", 18"

Antique - 16"

Polished - 16", 18"

Polished - 16"

Black - 16"









Media

Bauhaus

Brass - 16"

Brass - 18"

Brass - 16", 18"

Edwardian







Polished – 16"

Black - 18"

Polished - 18"

Trim options

Standard trim





Available in Brass, Black and Silver

Curved trim





Designer trim



Anodised aluminium trims available in Brass/Black, Black/Brass, Brass, Silver, Black/Silver and Silver/Black.

The Verine Power Flue System



A gas fire creates a welcoming heart to any living room but many newer homes are being built without a chimney or flue so a conventional gas fire is not an option.

However, Power Flue gas fires have been specifically designed for homes without a conventional flue system providing a gas fuelled alternative heat source to an electric fire or radiator.


Several of the models in the Verine range are available as a Power Flue option and our unique Side Flue System available on the Midas means that you don't even need to install your fire on an outside wall – making this one

of the most versatile gas fires on the market.

Shown right: an example of a basic Power Flue installation




The Verine Slimline Fan System fully recessed into an outside wall leaving only a discreet 3" projection. 96mm and 183mm spacers are available if required.



INSTALLATION

Installation Possibilities

The drawings below show a selection of the many possible installation situations.

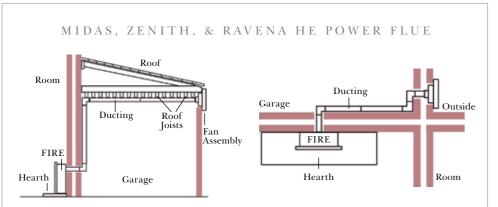

THE QUASAR AND SIGMA POWER FLUE These models feature a rear exit flue with a 400mm straight flue pipe.


THE RAVENA AND ZENITH POWER FLUE
These models are flued from the rear of the fire and


are suitable to be installed on a maximum flue length of 4 metres and 3 bends.

THE MIDAS POWER FLUE

This model can be flued from the rear or either side of the fire.

A range of specially designed flue pipe lengths and bends are available to maximise installation possibilities.



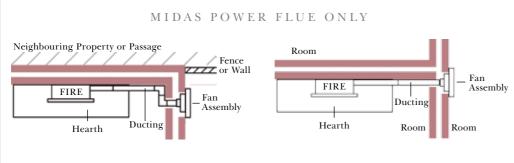

DIMENSIONS OF POWERFLUE FIRES



Builders' Opening Sizes

Cavity Wall

→ B →

Fire Model	Height Minimum	Height Maximum	Width Minimum	Width Maximum	
Orbis HE	550mm	570mm 400mm		450mm	
Quasar HE	550mm	570mm	370mm	450mm	
Frontier HE	550mm	570mm	370mm	450mm	
Midas HE	550mm	570mm	335mm	430mm	
Eden HE*	310mm	555mm	790mm	835mm	
Eden BF*	310mm	555mm	790mm	835mm	
Fontana HE*	540mm	545mm	750mm	780mm	
Fontana BF*	530mm	535mm	750mm	760mm	
Fontana HE Compact*	460mm	465mm	650mm	660mm	
Fontana HE Compact BF*	460mm	470mm	630mm	640mm	
Alpena BF	550mm	570mm	405mm	450mm	
Marcello*	615mm	623mm	750mm	780mm	
Ravena HE	550mm	570mm	405mm	450mm	
Acclaim	N/A	N/A	N/A	N/A	
Acclaim VIC	N/A	N/A	N/A	N/A	
Zodiac	550mm	570mm	405mm	425mm	
Quasar	555mm	575mm	355mm	475mm	
Frontier	555mm	575mm	355mm	475mm	
Sigma	555mm	575mm	355mm	475mm	
Midas	550mm	570mm	405mm	470mm	
Orbis	550mm	570mm	405mm	440mm	
Meridian*	720mm	730mm	550mm	565mm	
Meridian BF*	720mm	730mm	550mm	565mm	
Atina*	300mm	310mm	520mm	530mm	
Vertex*	350mm	365mm	710mm	740mm	
Carmelo*	250mm	250mm	1150mm	1150mm	

*Always refer to installation instructions for builders' opening sizes. For Atina HE, Carmelo HE, Da Vinci, Distinction and Eden HE opening sizes please refer to installation manual. All the above dimensions are based on installation in to brick built chimneys. Alternative minimum/maximum opening sizes may be required to achieve clearance from combustion studwork used in the creation of "false" chimney breast etc. Air vent requirements may vary depending on appliance and property type. Please refer to the product installation manual and consult your Gas Safe Register engineer for further details."

WARNING BFM Europe Limited is a Gas Safe Register company. We recommend that all of our fires are installed by Gas Safe Register engineers in accordance with our instructions.

DISCLAIMER Our policy is one of constant development and improvement. We therefore reserve the right to revise designs and specifications of our products without formal notice, patents pending.

Whilst we have taken every care in the preparation of this brochure it is not intended to replace the installation manual which provides more detailed information. Photography is for illustration purposes only and although every effort has been made to ensure accurate reproduction of typical installations and flame pictures they may vary according to fire model and flue types. We accept no liability for any loss or damage arising directly or indirectly from the use of this brochure. We recommend that all our fires are used in conjunction with central heating and not as a primary source of heat. In the interests of personal safety a suitable fireguard is recommended when children, the elderly and the infirm are present. (This brochure is copyright 2010 and must not be reproduced in whole or in any part without prior written permission.)

58 59